

Gourmet Cube Ice Machines up to 195 kg



Features

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Agion: the technology that makes products cleaner and longer lasting with built-in protection working 24/7 to resist the growth of microbes and the development of unpleasant odors.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.

Recommended Bins



SB 193
SB 322

Other options available



		[kg]	[lb]	N° *
MXGM 428 AS		190	419	9500
MXGM 428 WS		195	429	9750


*Estimate number of cubes.



[V/Hz/ph]
220-240/50/1



R404A



[WxDxH mm]
560 x 700 x 720
[WxDxH inches]
22"x 27,6"x 28,3"

This product qualifies for the following listings:



Certified ISO 9001:2008

Small Gourmet 8 g



Ø 21 x H 25 mm

Medium Gourmet 20 g



Ø 29 x H 34 mm

Large Gourmet 39 g



Ø 38 x H 41 mm

2 Years Warranty


Subject to certain limitations and exclusions

Download our free app **Scotsman Ice**

Available on:
Apple store
Google play
Windows store



Gourmet Cube Ice Machines up to 195 kg

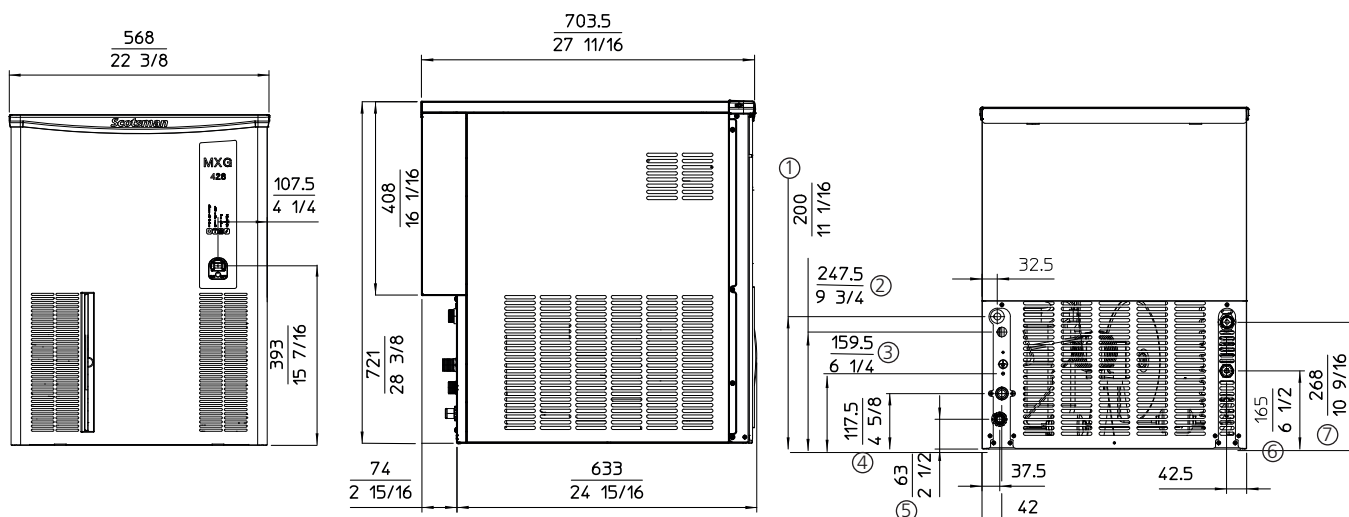

Minimum	Maximum
10°C (50°F)	43°C (110°F)
5°C (41°F)	38°C (100°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

- ① CORD SET
- ② CORD SET
- ③ GROUNDING SYSTEM
- ④ 3/4" GAS WATER INLET
- ⑤ 13/16" OD OVERFLOW DRAIN
- ⑥ 3/4" GAS WATER INLET - WS UNIT ONLY
- ⑦ 3/4" GAS WATER OULET - WS UNIT ONLY

	Temperature	Capacity	Dimensions	Power	FUSE	Energy	Water Inlet	Water Outlet	Weight	Volume
	+°C -°C	[Btu/h] [W]	[Ømm²]	[W]		[kWh] - 100 kg	[l/h]	[gal/h]	[kg] [lb]	[kg] [lb]
MXGM 428 AS	32°C 90°F	17050 5000	3 x 1,5	1850	16 A	28,7	15,4	4,0	66 145	77 169
MXGM 428 WS	21°C 70°F	17050 5000	3 x 1,5	1400	16 A	19,5	150,0	39,6	66 145	77 169

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.