


TEFCOLD®



2019-2020



# DISPLAY COOLERS

Table Top Coolers - Bottle Coolers - Display Coolers

Our small TEFCOLD display coolers are perfect on counter tops in cafés and restaurants. They are eye-catching and stimulate impulse sales if placed close to the payment point.

Display coolers are designed for shops, supermarkets, cafés, restaurants, gas stations etc. Often referred to as 'bottle coolers', they keep beverages cold whilst presenting and pro-

moting the products to their best advantage. Shelves, lighting and glass are all designed to enhance sales.

They come in a wide range of variants and sizes – with and without canopies. All models can be decorated on the sides and glass doors, and on the canopy for models with this feature.



TEFCOLD FSC1380-I

Display cooler with ventilated cooling and LED light in canopy and interior.  
To cool your beverages fast.



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Table Top Coolers



Sliding doors




Wall hanging bracket

## FSC100-I

### Tabletop Cooler


- Sliding glass doors
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Adjustable shelves
- Adjustable feet






### FS60CP-I Tabletop Cooler

- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Self-closing door
- Fixed shelves
- Adjustable feet



### FS80CP-I Tabletop Cooler

- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Self-closing doors
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | FS60CP-I                                | FS80CP-I                                | FSC100-I              |
|----------------------------|---------|-----------------------------------------|-----------------------------------------|-----------------------|
| Cans 330 ml                | pcs     | 48                                      | 114                                     | 96                    |
| Cans 500 ml                | pcs     | 48                                      | 84                                      | 72                    |
| Bottles 330 ml             | pcs     | 0                                       | 66                                      | 64                    |
| Bottles 500 ml PET         | pcs     | 0                                       | 66                                      | 64                    |
| Gross / Net Volume         | l       | 60 / 45                                 | 84 / 55                                 | 100 / 60              |
| Gross / Net Weight         | kg      | 37 / 32.5                               | 43 / 37.5                               | 51 / 45.5             |
| Climate Class              |         | 4                                       | 4                                       | 4                     |
| Temperature Range          | °C      | 2 to 10                                 | 2 to 10                                 | 2 to 10               |
| Door Number & Type         |         | 1 hinged heated self-closing glass door | 1 hinged heated self-closing glass door | 2 sliding glass doors |
| Reversible door            |         | Yes                                     | Yes                                     | Yes                   |
| Shelves Number & Type      |         | 2 fixed wire shelves                    | 2 wire shelves white                    | 3 wire shelves white  |
| Shelf Dimensions           |         | 398 x 275 mm                            | 400 x 270 mm                            | 577 x 209 mm          |
| Interior Light             |         | LED                                     | LED                                     | LED                   |
| Canopy Type                |         | D-Shape                                 | D-Shape                                 | D-Shape               |
| Canopy Light               |         | LED                                     | LED                                     | LED                   |
| Feet / Legs                |         | 4 adjustable feet                       | 4 adjustable feet                       | 4 adjustable feet     |
| Exterior Finish            |         | White                                   | White                                   | White                 |
| Interior Finish            |         | ABS                                     | ABS                                     | ABS                   |
| Lock                       |         | Yes                                     | Yes                                     | Yes                   |
| Thermometer                |         | Yes                                     | Yes                                     | Yes                   |
| Type of Controller         |         | Mechanical                              | Mechanical                              | Mechanical            |
| Noise Level                | db(A)   | 44                                      | 42                                      | 45                    |
| Type of Cooling            |         | Fan assisted                            | Fan assisted                            | Fan assisted          |
| Type of Defrost            |         | Automatic                               | Automatic                               | Automatic             |
| Refrigerant                |         | R600a                                   | R600a                                   | R600a                 |
| Refrigerant Charge         | g       | 35                                      | 40                                      | 43                    |
| Input Power                | W       | 85                                      | 85                                      | 85                    |
| Voltage / Frequency        | V/Hz    | 220-240/50                              | 220-240/50                              | 220-240/50            |
| Energy Consumption         | kWh/24h | 1                                       | 1,1                                     | 1,1                   |
| Internal Dimension (WxDxH) | mm      | 395 x 270 x 440                         | 410 x 380 x 550                         | 560 x 265 x 636       |
| External Dimension (WxDxH) | mm      | 445 x 440 x 720                         | 480 x 460 x 840                         | 655 x 390 x 930       |
| Packed Dimension (WxDxH)   | mm      | 510 x 530 x 850                         | 580 x 600 x 960                         | 750 x 500 x 1036      |
| 40ft Container Load        | pcs     | 176                                     | 152                                     | 160                   |





COOLERS




ECO-FRIENDLY  
REFRIGERANT R600a

# Table Top Coolers



Lock

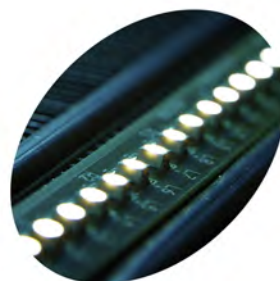


LED light

## BC145-I

### Bottle Cooler


- Hinged glass door
- LED interior light
- Curved reversible glass door
- Adjustable shelves
- Adjustable feet






### BC145-I W/FAN Bottle Cooler

- Hinged glass door
- LED interior light
- Fan assisted cooling
- Curved reversible glass door
- Adjustable shelves
- Adjustable feet



### BC85-I Bottle Cooler

- Hinged glass door
- LED interior light
- Grey frame and top
- Curved reversible glass door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | BC145-I                    | BC145-I W/FAN              | BC85-I                     | BC85-I WHITE               |
|----------------------------|---------|----------------------------|----------------------------|----------------------------|----------------------------|
| Cans 330 ml                | pcs     | 136                        | 136                        | 100                        | 100                        |
| Cans 500 ml                | pcs     | 89                         | 89                         | 70                         | 70                         |
| Bottles 330 ml             | pcs     | 76                         | 76                         | 64                         | 64                         |
| Bottles 500 ml PET         | pcs     | 76                         | 76                         | 64                         | 64                         |
| Gross / Net Volume         | l       | 109 / 105                  | 109 / 105                  | 92 / 85                    | 92 / 85                    |
| Gross / Net Weight         | kg      | 40 / 37                    | 40 / 37                    | 38 / 33                    | 38 / 33                    |
| Climate Class              |         | 4                          | 4                          | 4                          | 4                          |
| Temperature Range          | °C      | 2 to 10                    | 2 to 10                    | 2 to 10                    | 2 to 10                    |
| Door Number & Type         |         | 1 hinged curved glass door | 1 hinged curved glass door | 1 hinged curved glass door | 1 hinged curved glass door |
| Reversible door            |         | Yes                        | Yes                        | Yes                        | Yes                        |
| Shelves Number & Type      |         | 3 wire shelves white       | 3 wire shelves white       | 3 wire shelves white       | 3 wire shelves white       |
| Shelf Dimensions           |         | 410 x 353 mm               | 410 x 353 mm               | 410 x 353 mm               | 410 x 353 mm               |
| Interior Light             |         | LED                        | LED                        | LED                        | LED Cold white             |
| Feet / Legs                |         | 4 adjustable feet          | 4 adjustable feet          | 4 adjustable feet          | 4 adjustable feet          |
| Exterior Finish            |         | White                      | White                      | White                      | White / White doorframe    |
| Interior Finish            |         | ABS                        | ABS                        | ABS                        | ABS                        |
| Lock                       |         | Yes                        | Yes                        | Yes                        | Yes                        |
| Thermometer                |         | Yes                        | Yes                        | Yes                        | Yes                        |
| Type of Controller         |         | Mechanical                 | Mechanical                 | Mechanical                 | Mechanical                 |
| Noise Level                | db(A)   | 45                         | 45                         | 45                         | 45                         |
| Type of Cooling            |         | Static                     | Fan assisted               | Static                     | Static                     |
| Type of Defrost            |         | Automatic                  | Automatic                  | Automatic                  | Automatic                  |
| Refrigerant                |         | R600a                      | R600a                      | R600a                      | R600a                      |
| Refrigerant Charge         | g       | 28                         | 28                         | 28                         | 28                         |
| Input Power                | W       | 165                        | 165                        | 165                        | 165                        |
| Voltage / Frequency        | V/Hz    | 220-240/50                 | 220-240/50                 | 220-240/50                 | 220-240/50                 |
| Energy Consumption         | kWh/24h | 1,2                        | 1,17                       | 1,06                       | 1,06                       |
| Internal Dimension (WxDxH) | mm      | 410 x 415 x 710            | 410 x 415 x 710            | 410 x 415 x 630            | 410 x 415 x 630            |
| External Dimension (WxDxH) | mm      | 503 x 567 x 850            | 503 x 567 x 850            | 503 x 567 x 775            | 503 x 567 x 775            |
| Packed Dimension (WxDxH)   | mm      | 570 x 610 x 900            | 570 x 610 x 900            | 570 x 610 x 810            | 570 x 610 x 810            |
| 40ft Container Load        | pcs     | 228                        | 228                        | 228                        | 228                        |



COOLERS




ECO-FRIENDLY  
REFRIGERANT R600a

# Table Top Coolers



Designed for Energy-cans




LED light

## BC25CP-I

### Tabletop Cooler

- Hinged glass door
- LED interior light
- Canopy LED light
- Fan assisted cooling
- Self-closing door
- Fixed shelves
- Adjustable feet








### BC30-I Tabletop Cooler

- Hinged glass door
- LED interior light
- Fan assisted cooling
- Self-closing door
- Fixed shelves
- Adjustable feet



### BC60-I Tabletop Cooler

- Hinged glass door
- LED interior light
- Fan assisted cooling
- Self-closing door
- Adjustable shelves
- Adjustable feet

| MODEL                      |         | BC25CP-I                                | BC30-I                                  | BC60-I                                  |
|----------------------------|---------|-----------------------------------------|-----------------------------------------|-----------------------------------------|
| Cans 330 ml                | pcs     | 18                                      | 20                                      | 110                                     |
| Cans 500 ml                | pcs     | 18                                      | 20                                      | 55                                      |
| Gross / Net Volume         | l       | 25 / 22                                 | 22 / 20                                 | 67 / 58                                 |
| Gross / Net Weight         | kg      | 24 / 22                                 | 25 / 22                                 | 36 / 33                                 |
| Climate Class              |         | 4                                       | 4                                       | 4                                       |
| Temperature Range          | °C      | 2 to 10                                 | 2 to 10                                 | 2 to 10                                 |
| Door Number & Type         |         | 1 hinged heated self-closing glass door | 1 hinged heated self-closing glass door | 1 hinged heated self-closing glass door |
| Reversible door            |         | No                                      | No                                      | No                                      |
| Shelves Number & Type      |         | 2 wire shelves grey                     | 2 wire shelves black                    | 3 wire shelves black                    |
| Shelf Dimensions           |         | 250 x 250 mm                            | 275 x 205 / 135 mm                      | 340 x 270 / 205 mm                      |
| Interior Light             |         | LED                                     | LED                                     | LED                                     |
| Canopy Type                |         | D-Shape                                 | -                                       | -                                       |
| Canopy Light               |         | LED                                     | -                                       | -                                       |
| Feet / Legs                |         | 4 adjustable feet                       | 4 adjustable feet                       | 4 adjustable feet                       |
| Exterior Finish            |         | Black                                   | Black                                   | Black                                   |
| Interior Finish            |         | Coated aluminium, grey                  | Coated aluminium, black                 | Coated aluminium, black                 |
| Lock                       |         | Yes                                     | Yes                                     | Yes                                     |
| Thermometer                |         | No                                      | No                                      | No                                      |
| Type of Controller         |         | Mechanical                              | Mechanical                              | Mechanical                              |
| Noise Level                | db(A)   | 44                                      | 44                                      | 44                                      |
| Type of Cooling            |         | Fan assisted                            | Fan assisted                            | Fan assisted                            |
| Type of Defrost            |         | Automatic                               | Automatic                               | Automatic                               |
| Refrigerant                |         | R600a                                   | R600a                                   | R600a                                   |
| Refrigerant Charge         | g       | 20                                      | 20                                      | 24                                      |
| Input Power                | W       | 75                                      | 60                                      | 70                                      |
| Voltage / Frequency        | V/Hz    | 220-240/50                              | 220-240/50                              | 220-240/50                              |
| Energy Consumption         | kWh/24h | 0,72                                    | 0,78                                    | 0,83                                    |
| Internal Dimension (WxDxH) | mm      | 258 x 270 x 373                         | 280 x 271 x 380                         | 356 x 311 x 557                         |
| External Dimension (WxDxH) | mm      | 332 x 423 x 618                         | 356 x 406 x 491                         | 432 x 496 x 668                         |
| Packed Dimension (WxDxH)   | mm      | 380 x 470 x 640                         | 400 x 450 x 520                         | 480 x 550 x 700                         |
| 40ft Container Load        | pcs     | 450                                     | 580                                     | 280                                     |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Bottle Coolers



## DID YOU KNOW?

We offer branding of our products. We will prepare, print and place your advertising material on the units – at our warehouses or at the factories for larger quantities.



Strong handle




LED light inside door frame

## CEV425CP-I 2 LED

### Bottle Cooler

- One of our bestsellers
- Great product presentation
- Illuminated canopy
- Ideal for branding
- LED light inside door frame
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet






## FSC175H-I

### Bottle Cooler


- Hinged glass door
- LED illuminated canopy
- LED light in door frame
- Fan assisted cooling
- Self-closing door
- Adjustable shelves
- Adjustable feet



## CEV425-I BLACK

### Black display cooler

- Black interior and exterior
- Elegant design
- Great product presentation
- Extra shelf space
- Fan assisted cooling
- Reversible door
- LED light inside door frame
- Adjustable shelves



| MODEL                      |         | CEV425CP-I 2 LED     | CEV425-I 1 LED        | CEV425-I BLACK        | FSC175H-I            | GBC375-I             |
|----------------------------|---------|----------------------|-----------------------|-----------------------|----------------------|----------------------|
| Cans 330 ml                | pcs     | 455                  | 455                   | 455                   | 200                  | 455                  |
| Cans 500 ml                | pcs     | 301                  | 301                   | 301                   | 100                  | 301                  |
| Bottles 330 ml             | pcs     | 217                  | 217                   | 217                   | 100                  | 217                  |
| Bottles 500 ml PET         | pcs     | 217                  | 217                   | 217                   | 100                  | 217                  |
| Gross / Net Volume         | l       | 372 / 347            | 372 / 347             | 372 / 347             | 182 / 114            | 372 / 347            |
| Gross / Net Weight         | kg      | 83 / 78              | 80 / 75               | 80 / 75               | 70 / 64              | 85 / 77              |
| Climate Class              |         | 4                    | 4                     | 4                     | 4                    | 4                    |
| Temperature Range          | °C      | 2 to 10              | 2 to 10               | 2 to 10               | 2 to 10              | 2 to 10              |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door   | 1 hinged glass door   | 1 hinged glass door  | 1 hinged glass door  |
| Reversible door            |         | No                   | No                    | No                    | No                   | Yes                  |
| Shelves Number & Type      |         | 4 wire shelves white | 4 wire shelves white  | 5 wire shelves black  | 5 wire shelves white | 5 wire shelves white |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm          | 490 x 360 mm          | 342 x 266            | 490 x 360 mm         |
| Interior Light             |         | LED Horizontal       | LED inside door frame | LED inside door frame | LED                  | LED                  |
| Canopy Type                |         | D-Shape              | -                     | -                     | D-Shape              | -                    |
| Canopy Light               |         | LED                  | -                     | -                     | LED                  | -                    |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet     | 2 adjustable feet     | 2 adjustable feet    | 2 adjustable feet    |
| Castors                    |         | 2 rollers            | 2 rollers             | 2 rollers             | 2 rollers            | 2 rollers            |
| Exterior Finish            |         | White                | White                 | Black                 | White                | White                |
| Interior Finish            |         | White                | White                 | Black                 | White                | ABS                  |
| Lock                       |         | Yes                  | Yes                   | Yes                   | Yes                  | Yes                  |
| Thermometer                |         | Yes                  | Yes                   | Yes                   | Yes                  | Yes                  |
| Type of Controller         |         | Mechanical           | Mechanical            | Mechanical            | Mechanical           | Mechanical           |
| Noise Level                | db(A)   | 45                   | 45                    | 45                    | 45                   | 45                   |
| Type of Cooling            |         | Fan assisted         | Fan assisted          | Fan assisted          | Fan assisted         | Fan assisted         |
| Type of Defrost            |         | Automatic            | Automatic             | Automatic             | Automatic            | Automatic            |
| Refrigerant                |         | R600a                | R600a                 | R600a                 | R600a                | R600a                |
| Refrigerant Charge         | g       | 80                   | 80                    | 80                    | 50                   | 80                   |
| Input Power                | W       | 295                  | 295                   | 295                   | 200                  | 295                  |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50            | 220-240/50            | 220-240/50           | 220-240/50           |
| Energy Consumption         | kWh/24h | 1,66                 | 1,6                   | 1,6                   | 1,2                  | 1,4                  |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1555     | 470 x 440 x 1555      | 470 x 440 x 1555      | 357 x 362 x 1410     | 470 x 440 x 1555     |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1980     | 595 x 640 x 1840      | 595 x 640 x 1840      | 435 x 505 x 2013     | 595 x 640 x 1840     |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 2080     | 680 x 710 x 1940      | 680 x 710 x 1940      | 500 x 550 x 2060     | 680 x 710 x 1940     |
| 40ft Container Load        | pcs     | 54                   | 54                    | 54                    | 96                   | 54                   |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Bottle Coolers



Strong handle




Lock

## FS2380-I

### Bottle Cooler

- Hinged glass door
- Fan assisted cooling
- LED interior light
- Reversible doors
- Adjustable shelves
- Adjustable feet






## FS1220-I

### Bottle Cooler


- Hinged glass door
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



## FS1280-I

### Bottle Cooler

- Hinged glass door
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | FS1220-I             | FS1280-I             | FS1380-I             | FS2380-I                     |
|----------------------------|---------|----------------------|----------------------|----------------------|------------------------------|
| Cans 330 ml                | pcs     | 301                  | 392                  | 455                  | 448                          |
| Cans 500 ml                | pcs     | 175                  | 259                  | 301                  | 294                          |
| Bottles 330 ml             | pcs     | 133                  | 175                  | 217                  | 210                          |
| Bottles 500 ml PET         | pcs     | 133                  | 175                  | 217                  | 210                          |
| Gross / Net Volume         | l       | 215 / 190            | 290 / 260            | 372 / 347            | 372 / 347                    |
| Gross / Net Weight         | kg      | 64 / 59              | 78 / 70              | 85 / 77              | 85 / 76                      |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                            |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 2 to 10                      |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  | 2 split doors - hinged glass |
| Reversible door            |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 5 wire shelves white | 5 wire shelves white         |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm                 |
| Interior Light             |         | LED                  | LED                  | LED                  | LED                          |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet            |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            | 2 rollers                    |
| Exterior Finish            |         | White                | White                | White                | White                        |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  | ABS                          |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           | Mechanical                   |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   | 45                           |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         | Fan assisted                 |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Automatic                    |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                        |
| Refrigerant Charge         | g       | 50                   | 70                   | 80                   | 80                           |
| Input Power                | W       | 229                  | 266                  | 295                  | 295                          |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50                   |
| Energy Consumption         | kWh/24h | 1,9                  | 2                    | 2,3                  | 2,3                          |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1027     | 470 x 440 x 1347     | 470 x 440 x 1555     | 470 x 440 x 1555             |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1315     | 595 x 640 x 1635     | 595 x 640 x 1840     | 595 x 640 x 1840             |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 1410     | 680 x 710 x 1740     | 680 x 710 x 1940     | 680 x 710 x 1940             |
| 40ft Container Load        | pcs     | 54                   | 54                   | 54                   | 54                           |





COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Bottle Coolers



Strong handle




Lock

## FSC1380-I

### Bottle Cooler

- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet






## FSC1220-I

### Bottle Cooler


- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



## FSC1280-I

### Bottle Cooler

- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | FSC1220-I            | FSC1280-I            | FSC1380-I            | FSC2380-I                    |
|----------------------------|---------|----------------------|----------------------|----------------------|------------------------------|
| Cans 330 ml                | pcs     | 301                  | 392                  | 455                  | 455                          |
| Cans 500 ml                | pcs     | 175                  | 259                  | 301                  | 301                          |
| Bottles 330 ml             | pcs     | 133                  | 175                  | 217                  | 217                          |
| Bottles 500 ml PET         | pcs     | 133                  | 175                  | 217                  | 217                          |
| Gross / Net Volume         | l       | 215 / 190            | 290 / 260            | 372 / 347            | 372 / 347                    |
| Gross / Net Weight         | kg      | 72 / 63              | 83 / 74              | 87 / 79              | 89 / 81                      |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                            |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 2 to 10                      |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  | 2 split doors - hinged glass |
| Reversible door            |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 5 wire shelves white | 5 wire shelves white         |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm                 |
| Interior Light             |         | LED                  | LED                  | LED                  | LED Horizontal               |
| Canopy Type                |         | D-Shape              | D-Shape              | D-Shape              | D-Shape                      |
| Canopy Light               |         | LED                  | LED                  | LED                  | LED                          |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet            |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            | 2 rollers                    |
| Exterior Finish            |         | White                | White                | White                | White                        |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  | ABS                          |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           | Mechanical                   |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   | 45                           |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         | Fan assisted                 |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Automatic                    |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                        |
| Refrigerant Charge         | g       | 50                   | 70                   | 80                   | 80                           |
| Input Power                | W       | 230                  | 266                  | 295                  | 295                          |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50                   |
| Energy Consumption         | kWh/24h | 2                    | 2,1                  | 2,4                  | 2,4                          |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1027     | 470 x 440 x 1347     | 470 x 440 x 1555     | 470 x 440 x 1555             |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1455     | 595 x 640 x 1775     | 595 x 640 x 1980     | 595 x 640 x 1980             |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 1555     | 680 x 710 x 1875     | 680 x 710 x 2080     | 680 x 710 x 2080             |
| 40ft Container Load        | pcs     | 54                   | 54                   | 54                   | 54                           |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Bottle Coolers



Adjustable shelves




Digital thermometer

## SCU1420-I

### Bottle Cooler

- Hinged glass door
- Great branding possibilities
- Flexible loading options
- Internal LED light
- Ventilated cooling
- Adjustable shelves






## FSC1450-I

### Bottle Cooler


- Hinged glass door
- Illuminated canopy
- Fan assisted cooling
- Reversible door
- Adjustable shelves
- Adjustable feet



## SCU1450CP-I

### Bottle Cooler

- Hinged glass door
- Illuminated canopy
- Fan assisted cooling
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | FSC1450-I            | SCU1420-I            | SCU1450CP-I          |
|----------------------------|---------|----------------------|----------------------|----------------------|
| Cans 330 ml                | pcs     | 720                  | 455                  | 360                  |
| Cans 500 ml                | pcs     | 486                  | 301                  | 486                  |
| Bottles 330 ml             | pcs     | 360                  | 217                  | 360                  |
| Bottles 500 ml PET         | pcs     | 360                  | 217                  | 720                  |
| Gross / Net Volume         | l       | 438 / 374            | 387 / 276            | 438 / 374            |
| Gross / Net Weight         | kg      | 105 / 97             | 97 / 86              | 105 / 97             |
| Climate Class              |         | 4                    | 4                    | 4                    |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  |
| Reversible door            |         | Yes                  | Yes                  | Yes                  |
| Shelves Number & Type      |         | 6 wire shelves white | 5 wire shelves white | 6 wire shelves white |
| Shelf Dimensions           |         | 574 x 405 mm         | 495 x 360 mm         | 574 x 405 mm         |
| Interior Light             |         | LED                  | LED                  | LED                  |
| Canopy Type                |         | D-Shape              | -                    | D-Shape              |
| Canopy Light               |         | LED                  | -                    | LED                  |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    |
| Castors                    |         | 2 rollers            | 4 rollers            | 2 rollers            |
| Exterior Finish            |         | White                | White                | White                |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  |
| Lock                       |         | Yes                  | No                   | Yes                  |
| Thermometer                |         | Yes                  | Yes                  | Yes                  |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            |
| Refrigerant                |         | R600a                | R600a                | R600a                |
| Refrigerant Charge         | g       | 80                   | 85                   | 80                   |
| Input Power                | W       | 295                  | 235                  | 295                  |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           |
| Energy Consumption         | kWh/24h | 3,62                 | 2,9                  | 3,62                 |
| Internal Dimension (WxDxH) | mm      | 585 x 495 x 1515     | 505 x 500 x 1706     | 585 x 495 x 1515     |
| External Dimension (WxDxH) | mm      | 680 x 655 x 2090     | 595 x 670 x 2013     | 680 x 655 x 2090     |
| Packed Dimension (WxDxH)   | mm      | 690 x 755 x 2200     | 660 x 750 x 2180     | 690 x 755 x 2200     |
| 40ft Container Load        | pcs     | 51                   | 54                   | 51                   |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Bottle Coolers



Strong handle




Lock

## SCU1375-I

### Bottle Cooler

- Hinged glass door
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet






## SCU1220-I

### Bottle Cooler


- Hinged glass door
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



## SCU1280-I

### Bottle Cooler

- Hinged glass door
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | SCU1220-I            | SCU1280-I            | SCU1375-I            | SCU2375-I                    |
|----------------------------|---------|----------------------|----------------------|----------------------|------------------------------|
| Cans 330 ml                | pcs     | 301                  | 392                  | 455                  | 448                          |
| Cans 500 ml                | pcs     | 175                  | 259                  | 301                  | 294                          |
| Bottles 330 ml             | pcs     | 133                  | 175                  | 217                  | 210                          |
| Bottles 500 ml PET         | pcs     | 133                  | 175                  | 217                  | 210                          |
| Gross / Net Volume         | l       | 215 / 190            | 290 / 260            | 372 / 347            | 372 / 347                    |
| Gross / Net Weight         | kg      | 64 / 59              | 78 / 70              | 85 / 77              | 85 / 77                      |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                            |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 2 to 10                      |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  | 2 split doors - hinged glass |
| Reversible door            |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 5 wire shelves white | 5 wire shelves white         |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm                 |
| Interior Light             |         | LED                  | LED                  | LED                  | LED                          |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet            |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            | 2 rollers                    |
| Exterior Finish            |         | White                | White                | White                | White                        |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  | ABS                          |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           | Mechanical                   |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   | 45                           |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         | Fan assisted                 |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Automatic                    |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                        |
| Refrigerant Charge         | g       | 50                   | 70                   | 80                   | 80                           |
| Input Power                | W       | 229                  | 266                  | 295                  | 295                          |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50                   |
| Energy Consumption         | kWh/24h | 1,9                  | 2                    | 2,3                  | 2,3                          |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1027     | 470 x 440 x 1347     | 470 x 440 x 1555     | 470 x 440 x 1555             |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1315     | 595 x 640 x 1635     | 595 x 640 x 1840     | 595 x 640 x 1840             |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 1410     | 680 x 710 x 1740     | 680 x 710 x 1940     | 680 x 710 x 1940             |
| 40ft Container Load        | pcs     | 54                   | 54                   | 54                   | 54                           |





COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Bottle Coolers



Strong handle




Lock

## SCU1375CP-I

### Bottle Cooler

- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet






## SCU1220CP-I

### Bottle Cooler


- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



## SCU1280CP-I

### Bottle Cooler

- Hinged glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | SCU1220CP-I          | SCU1280CP-I          | SCU1375CP-I          | SCU2375CP-I                  |
|----------------------------|---------|----------------------|----------------------|----------------------|------------------------------|
| Cans 330 ml                | pcs     | 301                  | 392                  | 455                  | 448                          |
| Cans 500 ml                | pcs     | 175                  | 259                  | 301                  | 294                          |
| Bottles 330 ml             | pcs     | 133                  | 175                  | 217                  | 210                          |
| Bottles 500 ml PET         | pcs     | 133                  | 175                  | 217                  | 210                          |
| Gross / Net Volume         | l       | 215 / 190            | 290 / 260            | 372 / 347            | 372 / 347                    |
| Gross / Net Weight         | kg      | 72 / 63              | 83 / 74              | 87 / 79              | 89 / 81                      |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                            |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 2 to 10                      |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  | 2 split doors - hinged glass |
| Reversible door            |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 5 wire shelves white | 5 wire shelves white         |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm                 |
| Interior Light             |         | LED                  | LED                  | LED                  | LED                          |
| Canopy Type                |         | D-Shape              | D-Shape              | D-Shape              | D-Shape                      |
| Canopy Light               |         | LED                  | LED                  | LED                  | LED                          |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet            |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            | 2 rollers                    |
| Exterior Finish            |         | White                | White                | White                | White                        |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  | ABS                          |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | Yes                          |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           | Mechanical                   |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   | 45                           |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         | Fan assisted                 |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Automatic                    |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                        |
| Refrigerant Charge         | g       | 50                   | 70                   | 80                   | 80                           |
| Input Power                | W       | 229                  | 266                  | 295                  | 295                          |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50                   |
| Energy Consumption         | kWh/24h | 2                    | 2,1                  | 2,4                  | 2,4                          |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1027     | 470 x 440 x 1347     | 470 x 440 x 1555     | 470 x 440 x 1555             |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1455     | 595 x 640 x 1775     | 595 x 640 x 1980     | 595 x 640 x 1980             |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 1555     | 680 x 710 x 1875     | 680 x 710 x 2080     | 680 x 710 x 2080             |
| 40ft Container Load        | pcs     | 54                   | 54                   | 54                   | 54                           |




COOLERS



ECO-FRIENDLY  
REFRIGERANT R290

# Display Coolers



## FS1600H-P

### Display Cooler

- Improved product presentation
- Ventilated cooling
- 2 internal fans
- Less maintenance
- LED light inside door frame
- Adjustable shelves



LED light inside door frame




Digital thermostat




### FS1002S-P Display Cooler

- Self-closing sliding glass doors
- Ventilated cooling
- Internal vertical LED light
- Adjustable shelves
- Powder coated inner liner
- Adjustable feet



### FS1202S-P Display Cooler

- Self-closing sliding glass doors
- Ventilated cooling
- Internal vertical LED light
- Adjustable shelves
- Powder coated inner liner
- Adjustable feet



| MODEL                      |         | FS1002S-P                          | FS1202S-P                          | FS1600H-P                         |
|----------------------------|---------|------------------------------------|------------------------------------|-----------------------------------|
| Cans 330 ml                | pcs     | 1196                               | 1472                               | 1386                              |
| Cans 500 ml                | pcs     | 754                                | 928                                | 770                               |
| Bottles 330 ml             | pcs     | 546                                | 672                                | 734                               |
| Bottles 500 ml PET         | pcs     | 546                                | 672                                | 734                               |
| Gross / Net Volume         | l       | 730 / 540                          | 895 / 660                          | 1329 / 1233                       |
| Gross / Net Weight         | kg      | 176 / 163                          | 189 / 174                          | 212 / 207                         |
| Climate Class              |         | 4                                  | 4                                  | 4                                 |
| Temperature Range          | °C      | 2 to 10                            | 2 to 10                            | 2 to 10                           |
| Door Number & Type         |         | 2 self-closing sliding glass doors | 2 self-closing sliding glass doors | 3 hinged self-closing glass doors |
| Reversible door            |         | -                                  | -                                  | No                                |
| Shelves Number & Type      |         | 5 wire shelves white               | 5 wire shelves white               | 15 wire shelves white             |
| Shelf Dimensions           |         | 870 x 470 mm                       | 1072 x 470 mm                      | 465/535 x 470 mm                  |
| Interior Light             |         | LED                                | LED                                | LED                               |
| Feet / Legs                |         | 4 adjustable feet                  | 4 adjustable feet                  | 6 adjustable legs                 |
| Castors                    |         | 4 rollers                          | 4 rollers                          | 6 wheels                          |
| Exterior Finish            |         | White                              | White                              | White                             |
| Interior Finish            |         | Coated steel                       | Coated steel                       | White                             |
| Lock                       |         | No                                 | No                                 | No                                |
| Thermometer                |         | Yes                                | Yes                                | Yes                               |
| Type of Controller         |         | Electronic                         | Electronic                         | Electronic                        |
| Noise Level                | db(A)   | 48                                 | 48                                 | 45                                |
| Type of Cooling            |         | Ventilated                         | Ventilated                         | Ventilated                        |
| Type of Defrost            |         | Automatic                          | Automatic                          | Automatic                         |
| Refrigerant                |         | R290                               | R290                               | R290                              |
| Refrigerant Charge         | g       | 120                                | 120                                | 145                               |
| Input Power                | W       | 450                                | 450                                | 817                               |
| Voltage / Frequency        | V/Hz    | 220-240/50                         | 220-240/50                         | 220-240/50                        |
| Energy Consumption         | kWh/24h | 5,96                               | 6,8                                | 5,9                               |
| Internal Dimension (WxDxH) | mm      | 890 x 573 x 1533                   | 1090 x 573 x 1533                  | 1492 x 585 x 1518                 |
| External Dimension (WxDxH) | mm      | 1000 x 735 x 1990                  | 1200 x 735 x 1990                  | 1600 x 730 x 2030                 |
| Packed Dimension (WxDxH)   | mm      | 1040 x 780 x 2160                  | 1240 x 780 x 2160                  | 1660 x 795 x 2070                 |
| 40ft Container Load        | pcs     | 28                                 | 23                                 | 14                                |



COOLERS




ECO-FRIENDLY  
REFRIGERANT R290

# Display Coolers

DID YOU KNOW?

TEFCOLD has a passion for cooling... Our wholehearted passion for both cool products and customers means we experience a high level of customer satisfaction.



## FSC1600H-P

### Display Cooler

- Improved product presentation
- Ventilated cooling
- 2 internal fans
- LED illuminated canopy
- LED light inside door frame
- Less maintenance
- Adjustable shelves



LED light inside door frame




Digital thermostat



## FSC1000H-P

### Display Cooler


- Hinged glass doors
- Illuminated canopy
- Ventilated cooling
- Internal vertical light
- Adjustable shelves
- Adjustable feet



## FSC1950H-P

### Display Cooler

- Hinged glass doors
- Illuminated canopy
- Ventilated cooling
- Internal vertical light
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | FSC1000H-P           | FSC1200H-P           | FSC1600H-P                        | FSC1950H-P           | FSC890H-P                         |
|----------------------------|---------|----------------------|----------------------|-----------------------------------|----------------------|-----------------------------------|
| Cans 330 ml                | pcs     | 1287                 | 1584                 | 1218                              | 1020                 | 948                               |
| Cans 500 ml                | pcs     | 819                  | 1008                 | 840                               | 720                  | 480                               |
| Bottles 330 ml             | pcs     | 585                  | 720                  | 714                               | 560                  | 528                               |
| Bottles 500 ml PET         | pcs     | 585                  | 720                  | 714                               | 560                  | 468                               |
| Gross / Net Volume         | l       | 796 / 524            | 970 / 645            | 1329 / 1233                       | 875 / 645            | 707 / 535                         |
| Gross / Net Weight         | kg      | 175 / 162            | 189 / 174            | 212 / 207                         | 198 / 193            | 157 / 147                         |
| Climate Class              |         | 4                    | 4                    | 4                                 | 4                    | 4                                 |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10                           | 2 to 10              | 2 to 10                           |
| Door Number & Type         |         | 2 hinged glass door  | 2 hinged glass door  | 3 hinged self-closing glass doors | 2 hinged glass door  | 2 hinged self-closing glass doors |
| Reversible door            |         | No                   | No                   | No                                | No                   | No                                |
| Shelves Number & Type      |         | 5 wire shelves white | 5 wire shelves white | 15 wire shelves white             | 5 wire shelves white | 5 wire shelves white              |
| Shelf Dimensions           |         | 870 x 540 mm         | 1072 x 540 mm        | 465/535 x 470 mm                  | 985 x 555 mm         | 794 x 540 mm                      |
| Interior Light             |         | LED                  | LED                  | LED                               | Yes                  | LED                               |
| Canopy Type                |         | D-Shape              | D-Shape              | L-Shape                           | D-Shape              | D-Shape                           |
| Canopy Light               |         | LED                  | LED                  | LED                               | LED                  | LED                               |
| Feet / Legs                |         | 4 adjustable feet    | 4 adjustable feet    | 6 adjustable legs                 | 4 adjustable feet    | 4 adjustable feet                 |
| Castors                    |         | 4 rollers            | 4 rollers            | 6 wheels                          | 4 rollers            | 4 rollers                         |
| Exterior Finish            |         | White RAL9016        | White RAL9016        | White                             | White                | White                             |
| Interior Finish            |         | White                | White                | White                             | Coated steel         | Powder coated                     |
| Lock                       |         | No                   | No                   | No                                | No                   | No                                |
| Thermometer                |         | Yes                  | Yes                  | Yes                               | Yes                  | Yes                               |
| Type of Controller         |         | Electronic           | Electronic           | Electronic                        | Electronic           | Electronic                        |
| Noise Level                | db(A)   | 48                   | 48                   | 45                                | 48                   | 48                                |
| Type of Cooling            |         | Ventilated           | Ventilated           | Ventilated                        | Ventilated           | Ventilated                        |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic                         | Automatic            | Automatic                         |
| Refrigerant                |         | R290                 | R290                 | R290                              | R290                 | R290                              |
| Refrigerant Charge         | g       | 120                  | 120                  | 145                               | 125                  | 115                               |
| Input Power                | W       | 450                  | 880                  | 817                               | 490                  | 410                               |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50                        | 220-240/50           | 220-240/50                        |
| Energy Consumption         | kWh/24h | 5,96                 | 6,8                  | 5,9                               | 10,7                 | 2,55                              |
| Internal Dimension (WxDxH) | mm      | 890 x 670 x 1533     | 1090 x 670 x 1533    | 1492 x 585 x 1518                 | 1000 x 750 x 1533    | 810 x 561 x 1556                  |
| External Dimension (WxDxH) | mm      | 1000 x 790 x 2000    | 1200 x 790 x 2000    | 1600 x 730 x 2030                 | 1110 x 875 x 2010    | 890 x 740 x 1990                  |
| Packed Dimension (WxDxH)   | mm      | 1080 x 780 x 2100    | 1250 x 840 x 2100    | 1660 x 795 x 2070                 | 1180 x 910 x 1200    | 950 x 840 x 2160                  |
| 40ft Container Load        | pcs     | 28                   | 23                   | 14                                | 22                   | 28                                |






COOLERS



ECO-FRIENDLY  
REFRIGERANT R290

# Display Coolers



## FSC1950S-P

### Display Cooler

- Self-closing sliding glass doors
- Illuminated canopy
- Ventilated cooling
- Internal vertical light
- Adjustable shelves
- Adjustable feet



Sliding doors




Vertical internal light




### FSC1200S-P Display Cooler

- Self-closing sliding glass doors
- Illuminated canopy
- Ventilated cooling
- Internal vertical light
- Adjustable shelves
- Adjustable feet



### FSC890S-P Display Cooler

- Self-closing sliding glass doors
- Illuminated canopy
- Ventilated cooling
- Internal vertical light
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | FSC1000S-P                         | FSC1200S-P                         | FSC1950S-P                         | FSC890S-P                          |
|----------------------------|---------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| Cans 330 ml                | pcs     | 1144                               | 1408                               | 1020                               | 720                                |
| Cans 500 ml                | pcs     | 728                                | 896                                | 720                                | 504                                |
| Bottles 330 ml             | pcs     | 520                                | 640                                | 560                                | 360                                |
| Bottles 500 ml PET         | pcs     | 520                                | 640                                | 560                                | 360                                |
| Gross / Net Volume         | l       | 771 / 524                          | 945 / 645                          | 857 / 645                          | 707 / 462                          |
| Gross / Net Weight         | kg      | 164 / 159                          | 183 / 178                          | 198 / 193                          | 157 / 147                          |
| Climate Class              |         | 4                                  | 4                                  | 4                                  | 4                                  |
| Temperature Range          | °C      | 2 to 10                            | 2 to 10                            | 2 to 10                            | 2 to 10                            |
| Door Number & Type         |         | 2 self-closing sliding glass doors | 2 self-closing sliding glass doors | 2 self-closing sliding glass doors | 2 self-closing sliding glass doors |
| Shelves Number & Type      |         | 5 wire shelves white               | 5 wire shelves white               | 5 wire shelves white               | 5 wire shelves white               |
| Shelf Dimensions           |         | 870 x 470 mm                       | 1072 x 470 mm                      | 985 x 555 mm                       | 794 x 470 mm                       |
| Interior Light             |         | LED                                | LED                                | Yes                                | LED                                |
| Canopy Type                |         | D-Shape                            | D-Shape                            | D-Shape                            | D-Shape                            |
| Canopy Light               |         | LED                                | LED                                | LED                                | LED                                |
| Feet / Legs                |         | 4 adjustable feet                  | 4 adjustable feet                  | 4 adjustable feet                  | 4 adjustable feet                  |
| Castors                    |         | 4 rollers                          | 4 rollers                          | 4 rollers                          | 4 rollers                          |
| Exterior Finish            |         | White RAL9016                      | White RAL9016                      | White                              | White                              |
| Interior Finish            |         | White                              | White                              | Coated steel                       | Powder coated                      |
| Lock                       |         | No                                 | No                                 | No                                 | No                                 |
| Thermometer                |         | Yes                                | Yes                                | Yes                                | Yes                                |
| Type of Controller         |         | Electronic                         | Electronic                         | Electronic                         | Electronic                         |
| Noise Level                | db(A)   | 48                                 | 48                                 | 48                                 | 48                                 |
| Type of Cooling            |         | Ventilated                         | Ventilated                         | Ventilated                         | Ventilated                         |
| Type of Defrost            |         | Automatic                          | Automatic                          | Automatic                          | Automatic                          |
| Refrigerant                |         | R290                               | R290                               | R290                               | R290                               |
| Refrigerant Charge         | g       | 120                                | 120                                | 125                                | 115                                |
| Input Power                | W       | 450                                | 880                                | 490                                | 410                                |
| Voltage / Frequency        | V/Hz    | 220-240/50                         | 220-240/50                         | 220-240/50                         | 220-240/50                         |
| Energy Consumption         | kWh/24h | 5,96                               | 6,8                                | 10,7                               | 2,7                                |
| Internal Dimension (WxDxH) | mm      | 890 x 572 x 1533                   | 1090 x 572 x 1533                  | 1000 x 652 x 1533                  | 810 x 561 x 1556                   |
| External Dimension (WxDxH) | mm      | 1000 x 740 x 2000                  | 1200 x 740 x 2000                  | 1110 x 825 x 2010                  | 890 x 740 x 1990                   |
| Packed Dimension (WxDxH)   | mm      | 1080 x 780 x 2100                  | 1250 x 780 x 2100                  | 1180 x 910 x 2100                  | 950 x 840 x 2160                   |
| 40ft Container Load        | pcs     | 28                                 | 23                                 | 22                                 | 28                                 |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Display Coolers



Internal fan




Wheels or adjustable legs as  
option

## UR600G-I

### Display Cooler

- Hinged glass door
- LED interior light
- Electronic thermostat
- Fan assisted cooling
- Reversible door
- Adjustable shelves
- Adjustable feet






## UR200G-I

### Display Cooler


- Hinged glass door
- LED interior light
- Electronic thermostat
- Fan assisted cooling
- Reversible door
- Adjustable shelves
- Adjustable feet



## UR400G-I

### Display Cooler

- Hinged glass door
- LED interior light
- Electronic thermostat
- Fan assisted cooling
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | UR200G-I             | UR400G-I             | UR600G-I             |
|----------------------------|---------|----------------------|----------------------|----------------------|
| Cans 330 ml                | pcs     | 112                  | 448                  | 792                  |
| Cans 500 ml                | pcs     | 56                   | 273                  | 477                  |
| Bottles 330 ml             | pcs     | 64                   | 288                  | 480                  |
| Bottles 500 ml PET         | pcs     | 64                   | 217                  | 387                  |
| Gross / Net Volume         | l       | 130 / 119            | 374 / 350            | 605 / 570            |
| Gross / Net Weight         | kg      | 57 / 52              | 94 / 89              | 97 / 90              |
| Climate Class              |         | 4                    | 4                    | 4                    |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  |
| Reversible door            |         | Yes                  | Yes                  | Yes                  |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 4 wire shelves white |
| Shelf Dimensions           |         | 505 x 415 mm         | 505 x 415 mm         | GN2/1                |
| Interior Light             |         | LED                  | LED                  | LED                  |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            |
| Exterior Finish            |         | White                | White                | White                |
| Interior Finish            |         | White ABS            | White ABS            | White ABS            |
| Lock                       |         | Yes                  | Yes                  | Yes                  |
| Thermometer                |         | Yes                  | Yes                  | Yes                  |
| Type of Controller         |         | Electronic           | Electronic           | Electronic           |
| Noise Level                | db(A)   | 40                   | 40                   | 54                   |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            |
| Refrigerant                |         | R600a                | R600a                | R600a                |
| Refrigerant Charge         | g       | 35                   | 75                   | 100                  |
| Input Power                | W       | 105                  | 130                  | 130                  |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           |
| Energy Consumption         | kWh/24h | 1,78                 | 2,1                  | 2,9                  |
| Internal Dimension (WxDxH) | mm      | 510 x 485 x 620      | 510 x 485 x 1620     | 653 x 580 x 1680     |
| External Dimension (WxDxH) | mm      | 600 x 600 x 850      | 600 x 600 x 1850     | 777 x 750 x 1900     |
| Packed Dimension (WxDxH)   | mm      | 690 x 650 x 910      | 690 x 650 x 2050     | 850 x 770 x 2070     |
| 40ft Container Load        | pcs     | 108                  | 54                   | 42                   |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Display Coolers



Internal fan




Wheels or adjustable legs as  
option

## UR600SG-I

### Display Cooler

- Hinged glass door
- LED interior light
- Electronic thermostat
- Fan assisted cooling
- Stainless steel cabinet
- Reversible door
- Adjustable shelves GN2/1
- Adjustable feet






## UR200SG-I

### Display Cooler


- Hinged glass door
- LED interior light
- Electronic thermostat
- Fan assisted cooling
- Stainless steel cabinet
- Reversible door
- Adjustable shelves
- Adjustable feet



## UR400SG-I


### Display Cooler

- Hinged glass door
- LED interior light
- Electronic thermostat
- Fan assisted cooling
- Stainless steel cabinet
- Reversible door
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | UR200SG-I            | UR400SG-I            | UR600SG-I            |
|----------------------------|---------|----------------------|----------------------|----------------------|
| Cans 330 ml                | pcs     | 112                  | 448                  | 792                  |
| Cans 500 ml                | pcs     | 56                   | 273                  | 477                  |
| Bottles 330 ml             | pcs     | 64                   | 288                  | 480                  |
| Bottles 500 ml PET         | pcs     | 64                   | 217                  | 387                  |
| Gross / Net Volume         | l       | 130 / 119            | 374 / 350            | 605 / 570            |
| Gross / Net Weight         | kg      | 57 / 52              | 94 / 89              | 97 / 90              |
| Climate Class              |         | 4                    | 4                    | 4                    |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 1 hinged glass door  |
| Reversible door            |         | Yes                  | Yes                  | Yes                  |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 4 wire shelves white |
| Shelf Dimensions           |         | 505 x 415 mm         | 505 x 415 mm         | GN2/1                |
| Interior Light             |         | LED                  | LED Cold white       | LED                  |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            |
| Exterior Finish            |         | Stainless steel      | Stainless steel      | Stainless steel      |
| Interior Finish            |         | White ABS            | White ABS            | White ABS            |
| Lock                       |         | Yes                  | Yes                  | Yes                  |
| Thermometer                |         | Yes                  | Yes                  | Yes                  |
| Type of Controller         |         | Electronic           | Electronic           | Electronic           |
| Noise Level                | db(A)   | 40                   | 40                   | 45                   |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            |
| Refrigerant                |         | R600a                | R600a                | R600a                |
| Refrigerant Charge         | g       | 35                   | 170                  | 100                  |
| Input Power                | W       | 130                  | 130                  | 130                  |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           |
| Energy Consumption         | kWh/24h | 1,78                 | 2,1                  | 2,9                  |
| Internal Dimension (WxDxH) | mm      | 510 x 485 x 620      | 510 x 485 x 1620     | 653 x 580 x 1680     |
| External Dimension (WxDxH) | mm      | 600 x 600 x 850      | 600 x 600 x 1850     | 777 x 750 x 1900     |
| Packed Dimension (WxDxH)   | mm      | 690 x 650 x 910      | 690 x 560 x 2050     | 850 x 770 x 2070     |
| 40ft Container Load        | pcs     | 108                  | 54                   | 42                   |



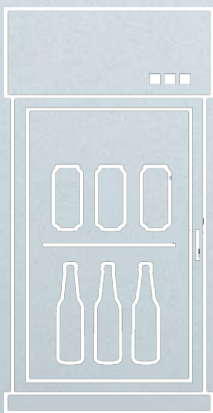

# CAN COOLERS

## Can Impulse Coolers

Mobile can coolers are perfect for stimulating impulse sales and for cold beverages, for example in connection with parties and events when mobility and flexibility are key.

They are ideal for branding and can be placed strategically many different places in a shop, or maybe close to a buffet.

Can coolers are extremely mobile and easy to handle. They are fitted with wheels or slides.

Every model also has ventilated cooling, which ensures faster, stable cooling of the contents compared to static cooling. This is particularly important for stimulating impulse sales.



TEFCOLD VOC100-I

Display can cooler with fan assisted cooling.  
A perfect and mobile solution for impulse sales.



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Can Coolers



Internal fan and 2 baskets




Strong castors

## CC55-I

### Can Cooler


- Fan assisted cooling
- Designed for canned drinks
- Fast pull-down of temperature
- Includes basket
- Flip-flop lid
- Well suited for branding
- Strong castors






### CC77-I Can Cooler

- Fan assisted cooling
- Designed for canned drinks
- Fast pull-down of temperature
- Includes basket
- Flip-flop lid
- Well suited for branding
- Strong castors




### VOC100-I Can Cooler

- Great product visibility
- Fan assisted cooling
- LED illuminated canopy
- Well suited for branding
- 7 gliding feet
- Castors optional



| MODEL                      |         | CC45-I                              | CC55-I                              | CC77-I                              | VOC100-I                 |
|----------------------------|---------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|
| Cans 330 ml                | pcs     | 44                                  | 84                                  | 78                                  | 80                       |
| Cans 500 ml                | pcs     | 22                                  | 42                                  | 36                                  | 50                       |
| Bottles 330 ml             | pcs     | 22                                  | 42                                  | 36                                  | 50                       |
| Bottles 500 ml PET         | pcs     | 20                                  | 38                                  | 32                                  | 50                       |
| Gross / Net Volume         | l       | 53 / 50                             | 80 / 78                             | 80 / 72                             | 110 / 103                |
| Gross / Net Weight         | kg      | 25 / 22                             | 30 / 29                             | 31 / 29                             | 31 / 29                  |
| Climate Class              |         | 4                                   | 4                                   | 4                                   | 4                        |
| Temperature Range          | °C      | 2 to 12                             | 2 to 12                             | 2 to 12                             | 2 to 12                  |
| Lid Number & Type          |         | 1 transparent acrylic flip-flop lid | 1 transparent acrylic flip-flop lid | 1 transparent acrylic flip-flop lid | -                        |
| Basket Number & Type       |         | 1 Wire basket, grey                 | 2 Wire basket                       | 1 Wire basket, grey                 | -                        |
| Interior Light             |         | No                                  | No                                  | No                                  | LED                      |
| Feet / Legs                |         | -                                   | -                                   | -                                   | 7 gliding feet           |
| Castors                    |         | 4 castors, 1 lockable               | 4 castors, 1 lockable               | 4 castors, 1 lockable               | -                        |
| Exterior Finish            |         | Black                               | White                               | Black                               | Grey, RAL9006            |
| Interior Finish            |         | Powder coated steel                 | Powder coated steel                 | Powder coated steel                 | Powder coated steel, SAC |
| Thermometer                |         | No                                  | No                                  | No                                  | Yes                      |
| Type of Controller         |         | Mechanical                          | Mechanical                          | Mechanical                          | Electronic               |
| Noise Level                | db(A)   | 45                                  | 45                                  | 45                                  | 42                       |
| Type of Cooling            |         | Fan assisted                        | Fan assisted                        | Fan assisted                        | Ventilated               |
| Type of Defrost            |         | Automatic                           | Automatic                           | Automatic                           | Automatic                |
| Refrigerant                |         | R600a                               | R600a                               | R600a                               | R600a                    |
| Refrigerant Charge         | g       | 40                                  | 45                                  | 45                                  | 55                       |
| Input Power                | W       | 76                                  | 76                                  | 112                                 | 160                      |
| Voltage / Frequency        | V/Hz    | 220-240/50                          | 220-240/50                          | 220-240/50                          | 220-240/50               |
| Energy Consumption         | kWh/24h | 1,2                                 | 1,3                                 | 0,95                                | 2,6                      |
| Internal Dimension (WxDxH) | mm      | 375 x 375 x 470                     | 380 x 380 x 655                     | 450 x 450 x 475                     | 520 x 520 x 570          |
| External Dimension (WxDxH) | mm      | 457 x 457 x 830                     | 457 x 457 x 1076                    | 567 x 567 x 830                     | 660 x 660 x 970          |
| Packed Dimension (WxDxH)   | mm      | 480 x 480 x 850                     | 480 x 480 x 1120                    | 580 x 580 x 880                     | 690 x 500 x 1150         |
| 40ft Container Load        | pcs     | 250                                 | 160                                 | 238                                 | 128                      |



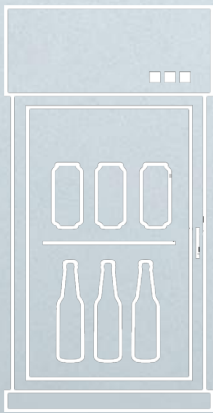

# BACK BARS


Back Bars - KEG Coolers - Undercounters

TEFCOLD back bars are ideal for use under the counter in bars, cafés and restaurants. They can be fully build in, as the air intake and exhaust are both at the front.

All our backbars are designed for rapid product cooling, to ensure cold beverages are always on offer. And we went into detail for the personnel using them: the thermostat is placed on the outside of the units for easy access,

and the door handle is at the top, avoiding having to bend down too far to open and close the door.

The Premium back bar range features aluminium doors and chrome shelves with closely-spaced wires, to give stability and high capacity. The Standard range has white plastic-coated wire shelves for easy maintenance. If enhanced cooling capacity is needed, we offer a 'heavy duty' range.

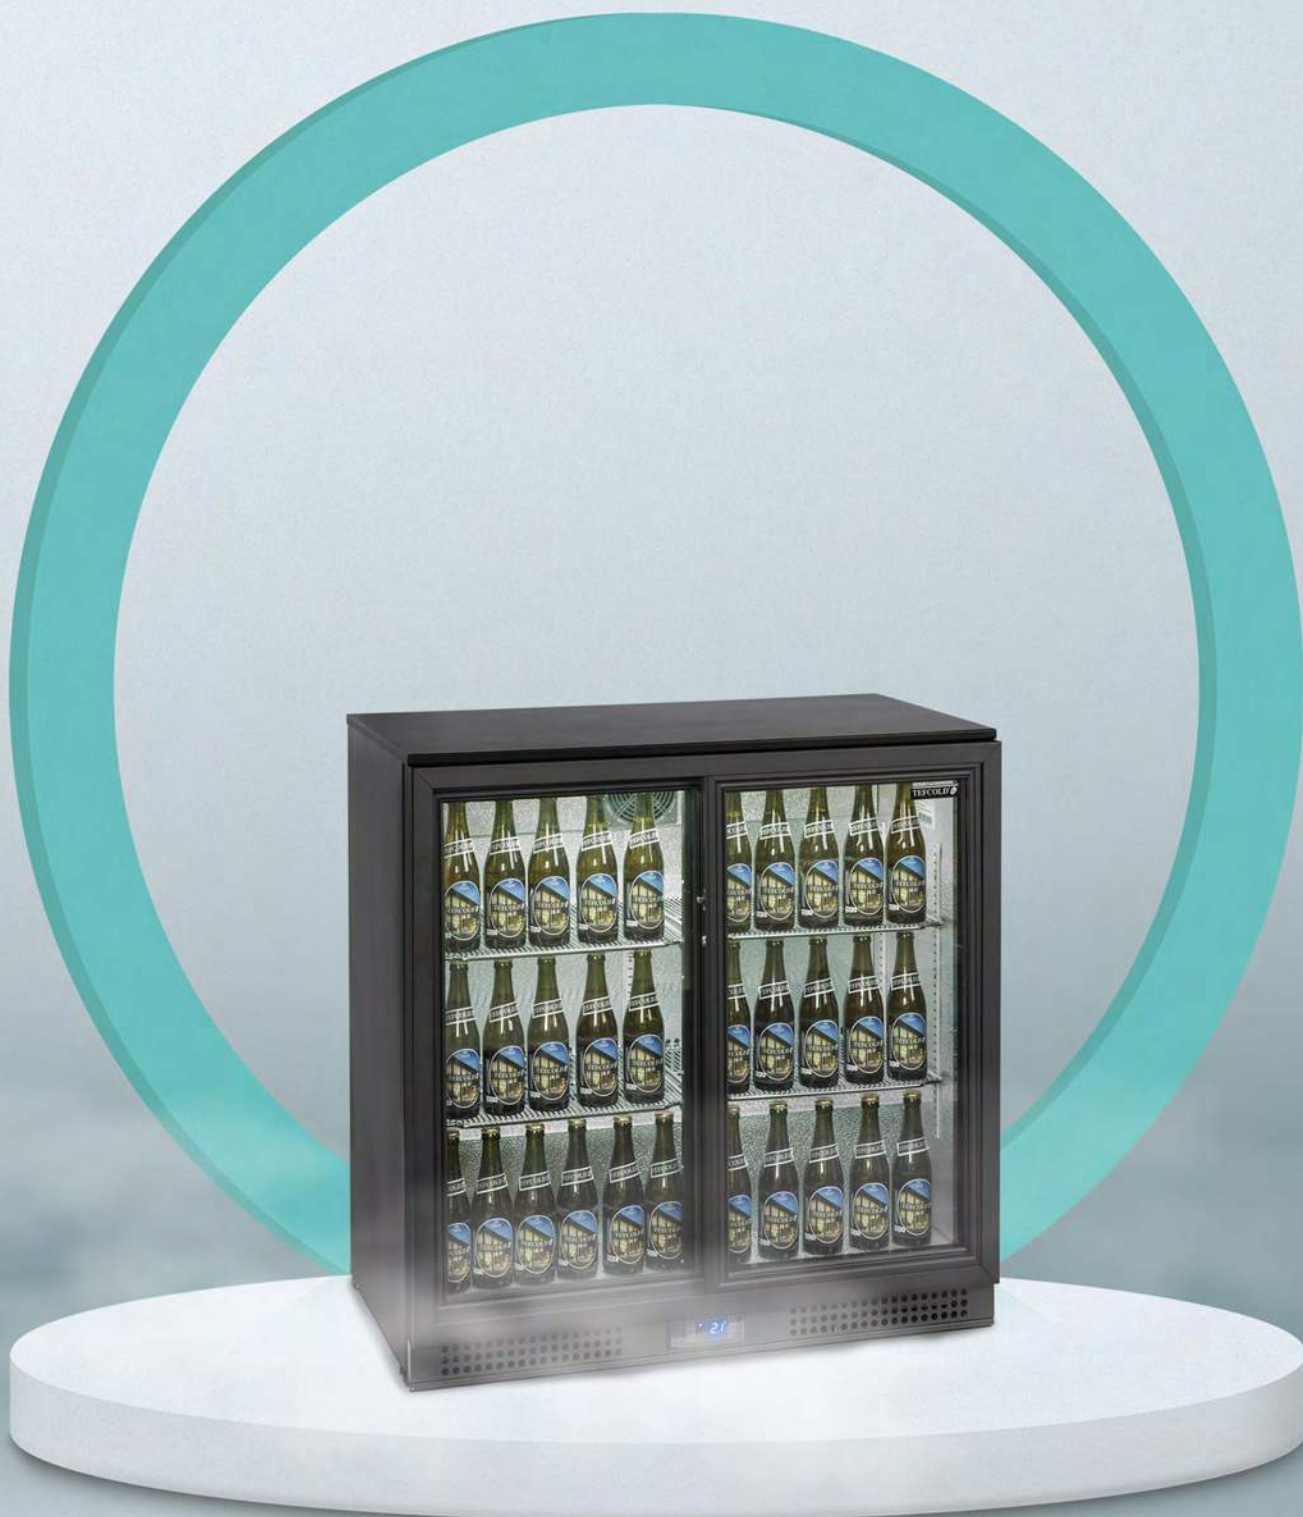

#### TEFCOLD BA20S-I

Back bar with self-closing sliding glass doors and rapid product cooling.  
When easy access and product replenishment is key.





COOLERS



ECO-FRIENDLY  
REFRIGERANT R290

# Back Bars



## DB300S-3-P

### Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Self-closing sliding glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



Protective thermostat cover



Door holder for loading of the cabinet




### DB125H-I Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Reversible glass door
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



### DB200H-I Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Hinged glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | DB105H-I             | DB125H-I             | DB200H-I             | DB200S-I              | DB300H-3-P           | DB300S-3-P            |
|----------------------------|---------|----------------------|----------------------|----------------------|-----------------------|----------------------|-----------------------|
| Cans 330 ml                | pcs     | 113                  | 161                  | 276                  | 276                   | 380                  | 380                   |
| Cans 500 ml                | pcs     | 96                   | 112                  | 188                  | 188                   | 266                  | 266                   |
| Bottles 330 ml             | pcs     | 70                   | 84                   | 143                  | 143                   | 218                  | 218                   |
| Bottles 500 ml PET         | pcs     | 70                   | 84                   | 143                  | 143                   | 218                  | 218                   |
| Gross / Net Volume         | l       | 100 / 94             | 122 / 116            | 191 / 183            | 191 / 183             | 300 / 278            | 300 / 278             |
| Gross / Net Weight         | kg      | 55 / 53              | 53 / 45              | 73 / 68              | 73 / 68               | 97 / 86              | 97 / 86               |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                     | 4                    | 4                     |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 2 to 10               | 2 to 10              | 2 to 10               |
| Door Number & Type         |         | 1 hinged glass door  | 1 hinged glass door  | 2 hinged glass doors | 2 sliding glass doors | 3 hinged glass doors | 3 sliding glass doors |
| Tempered glass             |         | Yes                  | Yes                  | Yes                  | Yes                   | Yes                  | Yes                   |
| Shelves Number & Type      |         | 2 wire shelves white | 2 wire shelves white | 4 wire shelves white | 4 wire shelves white  | 6 wire shelves white | 6 wire shelves white  |
| Shelf Dimensions           |         | 398x335              | 498x335              | 395x330              | 395x330               | 395x330              | 395x330               |
| Interior Light             |         | LED                  | LED                  | LED                  | LED                   | LED                  | LED                   |
| Feet / Legs                |         | 4 adjustable feet    | 4 adjustable feet    | 4 adjustable feet    | 4 adjustable feet     | 4 adjustable feet    | 4 adjustable feet     |
| Exterior Finish            |         | Black                | Black                | Black                | Black                 | Black                | Black                 |
| Interior Finish            |         | Stucco aluminium     | Stucco aluminium     | Stucco aluminium     | Stucco aluminium      | Stucco aluminium     | Stucco aluminium      |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                   | Yes                  | Yes                   |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | Yes                   | Yes                  | Yes                   |
| Type of Controller         |         | Electronic           | Electronic           | Electronic           | Electronic            | Electronic           | Electronic            |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   | 45                    | 45                   | 45                    |
| Type of Cooling            |         | Ventilated           | Ventilated           | Ventilated           | Ventilated            | Ventilated           | Ventilated            |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Automatic             | Automatic            | Automatic             |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                 | R290                 | R290                  |
| Refrigerant Charge         | g       | 48                   | 60                   | 70                   | 70                    | 90                   | 90                    |
| Input Power                | W       | 150                  | 150                  | 175                  | 175                   | 320                  | 320                   |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50            | 220-240/50           | 220-240/50            |
| Energy Consumption         | kWh/24h | 1,88                 | 2,1                  | 2,7                  | 2,7                   | 4                    | 4                     |
| Internal Dimension (WxDxH) | mm      | 408 x 355 x 720      | 508 x 355 x 720      | 810 x 350 x 720      | 805 x 345 x 720       | 1257 x 345 x 720     | 1257 x 345 x 720      |
| External Dimension (WxDxH) | mm      | 500 x 520 x 870      | 600 x 520 x 870      | 900 x 520 x 870      | 900 x 515 x 870       | 1355 x 520 x 870     | 1355 x 515 x 870      |
| Packed Dimension (WxDxH)   | mm      | 585 x 600 x 940      | 700 x 600 x 950      | 1000 x 600 x 950     | 1000 x 600 x 950      | 1430 x 600 x 940     | 1430 x 600 x 940      |
| 40ft Container Load        | pcs     | 160                  | 136                  | 96                   | 96                    | 64                   | 64                    |




COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Back Bars



## BA25H-I

### Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Hinged glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



Electronic thermostat



Wine shelves as option




### BA15H-I Backbar Cooler

- LED interior light
- Ventilated cooling
- Double glazed reversible glass door
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



### BA25S-I S/A Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Self-closing sliding glass doors
- Stainless steel exterior
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | BA15H-I               | BA25H-I               | BA25S-I               | BA25S-I S/A           | BA5H-I                |
|----------------------------|---------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Cans 330 ml                | pcs     | 161                   | 276                   | 276                   | 276                   | 113                   |
| Cans 500 ml                | pcs     | 112                   | 188                   | 188                   | 188                   | 96                    |
| Bottles 330 ml             | pcs     | 84                    | 143                   | 143                   | 143                   | 70                    |
| Bottles 500 ml PET         | pcs     | 84                    | 143                   | 143                   | 143                   | 70                    |
| Gross / Net Volume         | l       | 122 / 116             | 191 / 183             | 191 / 183             | 191 / 183             | 100 / 94              |
| Gross / Net Weight         | kg      | 53 / 45               | 73 / 68               | 73 / 68               | 73 / 68               | 45 / 38               |
| Climate Class              |         | 4                     | 4                     | 4                     | 4                     | 4                     |
| Temperature Range          | °C      | 2 to 10               | 2 to 10               | 2 to 10               | 2 to 10               | 2 to 10               |
| Door Number & Type         |         | 1 hinged glass door   | 2 hinged glass doors  | 2 sliding glass doors | 2 sliding glass doors | 1 hinged glass door   |
| Tempered glass             |         | Yes                   | Yes                   | Yes                   | Yes                   | Yes                   |
| Shelves Number & Type      |         | 2 wire shelves chrome | 4 wire shelves chrome | 4 wire shelves chrome | 4 wire shelves chrome | 2 wire shelves chrome |
| Shelf Dimensions           |         | 498x335               | 395x330               | 395x330               | 395x330               | 398x335               |
| Interior Light             |         | LED                   | LED                   | LED                   | LED                   | LED                   |
| Feet / Legs                |         | 4 adjustable feet     | 4 adjustable feet     | 4 adjustable feet     | 4 adjustable feet     | 4 adjustable feet     |
| Exterior Finish            |         | Black                 | Black                 | Black                 | Stainless steel       | Black                 |
| Interior Finish            |         | Stucco aluminium      | Stucco aluminium      | Stucco aluminium      | Stucco aluminium      | Stucco aluminium      |
| Lock                       |         | Yes                   | Yes                   | Yes                   | Yes                   | Yes                   |
| Thermometer                |         | Yes                   | Yes                   | Yes                   | Yes                   | Yes                   |
| Type of Controller         |         | Electronic            | Electronic            | Electronic            | Electronic            | Electronic            |
| Noise Level                | db(A)   | 45                    | 45                    | 45                    | 45                    | 45                    |
| Type of Cooling            |         | Ventilated            | Ventilated            | Ventilated            | Ventilated            | Ventilated            |
| Type of Defrost            |         | Automatic             | Automatic             | Automatic             | Automatic             | Automatic             |
| Refrigerant                |         | R600a                 | R600a                 | R600a                 | R600a                 | R600a                 |
| Refrigerant Charge         | g       | 60                    | 70                    | 70                    | 70                    | 50                    |
| Input Power                | W       | 210                   | 230                   | 230                   | 230                   | 210                   |
| Voltage / Frequency        | V/Hz    | 220-240/50            | 220-240/50            | 220-240/50            | 220-240/50            | 220-240/50            |
| Energy Consumption         | kWh/24h | 2,1                   | 2,7                   | 2,7                   | 2,7                   | 2,1                   |
| Internal Dimension (WxDxH) | mm      | 508 x 355 x 720       | 810 x 350 x 720       | 805 x 345 x 720       | 805 x 345 x 720       | 410 x 350 x 720       |
| External Dimension (WxDxH) | mm      | 600 x 520 x 870       | 900 x 520 x 870       | 900 x 515 x 870       | 900 x 515 x 870       | 500 x 520 x 870       |
| Packed Dimension (WxDxH)   | mm      | 700 x 600 x 950       | 1000 x 600 x 950      | 1000 x 600 x 950      | 1000 x 600 x 950      | 585 x 600 x 950       |
| 40ft Container Load        | pcs     | 136                   | 96                    | 96                    | 96                    | 160                   |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Back Bars



|       |       |       |       |
|-------|-------|-------|-------|
|       |       |       |       |
| 33 cl | 50 cl | 33 cl | 50 cl |
| 276   | 168   | 143   | 143   |

## BA20S-I

### Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Self-closing sliding glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



Electronic thermostat



Adjustable shelves





## BA30S-3-P

### Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Self-closing sliding glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



380 266 218 218

### DID YOU KNOW?

Our backbars are offered with both 87 and 90 cm height and with sliding or hinged doors – all with double glassed glass doors.

| MODEL                      |         | BA20S-I               | BA30S-3-P             |
|----------------------------|---------|-----------------------|-----------------------|
| Cans 330 ml                | pcs     | 276                   | 380                   |
| Cans 500 ml                | pcs     | 168                   | 266                   |
| Bottles 330 ml             | pcs     | 143                   | 218                   |
| Bottles 500 ml PET         | pcs     | 143                   | 218                   |
| Gross / Net Volume         | l       | 196 / 188             | 328 / 320             |
| Gross / Net Weight         | kg      | 73 / 68               | 113 / 108             |
| Climate Class              |         | 4                     | 4                     |
| Temperature Range          | °C      | 2 to 10               | 2 to 10               |
| Door Number & Type         |         | 2 sliding glass doors | 3 sliding glass doors |
| Tempered glass             |         | Yes                   | Yes                   |
| Shelves Number & Type      |         | 4 wire shelves chrome | 6 wire shelves chrome |
| Shelf Dimensions           |         | 395x330               | 405x365               |
| Interior Light             |         | LED                   | LED                   |
| Feet / Legs                |         | 4 adjustable feet     | 4 adjustable feet     |
| Exterior Finish            |         | Black                 | Black                 |
| Interior Finish            |         | Stucco aluminium      | Stucco aluminium      |
| Lock                       |         | Yes                   | Yes                   |
| Thermometer                |         | Yes                   | Yes                   |
| Type of Controller         |         | Electronic            | Electronic            |
| Noise Level                | db(A)   | 45                    | 45                    |
| Type of Cooling            |         | Ventilated            | Ventilated            |
| Type of Defrost            |         | Automatic             | Automatic             |
| Refrigerant                |         | R600a                 | R290                  |
| Refrigerant Charge         | g       | 70                    | 90                    |
| Input Power                | W       | 175                   | 320                   |
| Voltage / Frequency        | V/Hz    | 220-240/50            | 220-240/50            |
| Energy Consumption         | kWh/24h | 2,7                   | 4                     |
| Internal Dimension (WxDxH) | mm      | 805 x 345 x 730       | 1257 x 345 x 730      |
| External Dimension (WxDxH) | mm      | 900 x 515 x 900       | 1355 x 515 x 900      |
| Packed Dimension (WxDxH)   | mm      | 1000 x 600 x 950      | 1430 x 600 x 950      |
| 40ft Container Load        | pcs     | 96                    | 64                    |





COOLERS



ECO-FRIENDLY  
REFRIGERANT R290

# Back Bars



## BA30H-P

### Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Hinged glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



Electronic thermostat




Lock




### BA10H-I Backbar Cooler

- LED interior light
- Ventilated cooling
- Double glazed reversible glass door
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



### BA20H-I Backbar Cooler

- Double glazed tempered glass
- LED interior light
- Ventilated cooling
- Hinged glass doors
- Easy access electronic thermostat
- Adjustable shelves
- Adjustable feet



| MODEL                      |         | BA10H-I               | BA20H-I               | BA30H-P               |
|----------------------------|---------|-----------------------|-----------------------|-----------------------|
| Cans 330 ml                | pcs     | 161                   | 276                   | 380                   |
| Cans 500 ml                | pcs     | 112                   | 188                   | 266                   |
| Bottles 330 ml             | pcs     | 96                    | 143                   | 218                   |
| Bottles 500 ml PET         | pcs     | 96                    | 143                   | 218                   |
| Gross / Net Volume         | l       | 122 / 116             | 196 / 188             | 328 / 320             |
| Gross / Net Weight         | kg      | 53 / 45               | 73 / 66               | 111 / 106             |
| Climate Class              |         | 4                     | 4                     | 4                     |
| Temperature Range          | °C      | 2 to 10               | 2 to 10               | 2 to 10               |
| Door Number & Type         |         | 1 hinged glass door   | 2 hinged glass doors  | 3 hinged glass doors  |
| Tempered glass             |         | Yes                   | Yes                   | Yes                   |
| Shelves Number & Type      |         | 2 wire shelves chrome | 4 wire shelves chrome | 6 wire shelves chrome |
| Shelf Dimensions           |         | 496x360               | 395x330               | 395x330               |
| Interior Light             |         | LED                   | LED                   | LED                   |
| Feet / Legs                |         | 4 adjustable feet     | 4 adjustable feet     | 4 adjustable feet     |
| Exterior Finish            |         | Black                 | Black                 | Black                 |
| Interior Finish            |         | Stucco aluminium      | Stucco aluminium      | Stucco aluminium      |
| Lock                       |         | Yes                   | Yes                   | Yes                   |
| Thermometer                |         | Yes                   | Yes                   | Yes                   |
| Type of Controller         |         | Electronic            | Electronic            | Electronic            |
| Noise Level                | db(A)   | 45                    | 45                    | 45                    |
| Type of Cooling            |         | Ventilated            | Ventilated            | Ventilated            |
| Type of Defrost            |         | Automatic             | Automatic             | Automatic             |
| Refrigerant                |         | R600a                 | R600a                 | R290                  |
| Refrigerant Charge         | g       | 60                    | 70                    | 90                    |
| Input Power                | W       | 210                   | 175                   | 320                   |
| Voltage / Frequency        | V/Hz    | 220-240/50            | 220-240/50            | 220-240/50            |
| Energy Consumption         | kWh/24h | 2,1                   | 2,7                   | 4                     |
| Internal Dimension (WxDxH) | mm      | 508 x 355 x 732       | 805 x 345 x 730       | 1257 x 345 x 730      |
| External Dimension (WxDxH) | mm      | 600 x 520 x 900       | 900 x 520 x 900       | 1355 x 520 x 900      |
| Packed Dimension (WxDxH)   | mm      | 700 x 600 x 950       | 1000 x 600 x 950      | 1430 x 600 x 950      |
| 40ft Container Load        | pcs     | 136                   | 96                    | 64                    |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R290

# Back Bars



## CBC410G-P

### Backbar Cooler

- Robust heavy duty equipment
- Ventilated cooling
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet



Lock



Adjustable shelves



### CBC210G-P

Backbar Cooler

- Robust heavy duty equipment
- Ventilated cooling
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet



### CBC310G-P

Backbar Cooler

- Robust heavy duty equipment
- Ventilated cooling
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet

| MODEL                      |         | CBC210G-P                         | CBC310G-P                         | CBC410G-P                         |
|----------------------------|---------|-----------------------------------|-----------------------------------|-----------------------------------|
| Gross / Net Volume         | l       | 290 / 277                         | 460 / 442                         | 630 / 605                         |
| Gross / Net Weight         | kg      | 123 / 118                         | 153 / 138                         | 185 / 180                         |
| Climate Class              |         | 4                                 | 4                                 | 4                                 |
| Temperature Range          | °C      | 2 to 10                           | 2 to 10                           | 2 to 10                           |
| Door Number & Type         |         | 2 hinged self-closing glass doors | 3 hinged self-closing glass doors | 4 hinged self-closing glass doors |
| Tempered glass             |         | Yes                               | Yes                               | Yes                               |
| Shelves Number & Type      |         | 4 SS304 shelves                   | 6 SS304 shelves                   | 8 SS304 shelves                   |
| Interior Light             |         | LED                               | LED                               | LED                               |
| Feet / Legs                |         | 6 adjustable feet                 | 8 adjustable feet                 | 10 adjustable feet                |
| Exterior Finish            |         | Black                             | Black                             | Black                             |
| Interior Finish            |         | SS430 mirror polished             | SS430 mirror polished             | SS430 mirror polished             |
| Lock                       |         | Yes                               | Yes                               | Yes                               |
| Thermometer                |         | Yes                               | Yes                               | Yes                               |
| Type of Controller         |         | Electronic                        | Electronic                        | Electronic                        |
| Noise Level                | db(A)   | 42                                | 42                                | 42                                |
| Type of Cooling            |         | Ventilated                        | Ventilated                        | Ventilated                        |
| Type of Defrost            |         | Automatic                         | Automatic                         | Automatic                         |
| Refrigerant                |         | R290                              | R290                              | R290                              |
| Refrigerant Charge         | g       | 95                                | 95                                | 95                                |
| Input Power                | W       | 250                               | 250                               | 320                               |
| Voltage / Frequency        | V/Hz    | 220-240/50                        | 220-240/50                        | 220-240/50                        |
| Energy Consumption         | kWh/24h | 3,21                              | 3,67                              | 4,22                              |
| Internal Dimension (WxDxH) | mm      | 1082 x 415 x 760                  | 1622 x 415 x 760                  | 2162 x 415 x 760                  |
| External Dimension (WxDxH) | mm      | 1462 x 513 x 860                  | 2002 x 513 x 860                  | 2542 x 513 x 860                  |
| Packed Dimension (WxDxH)   | mm      | 1540 x 580 x 1050                 | 2060 x 580 x 1050                 | 2650 x 580 x 1050                 |
| 40ft Container Load        | pcs     | 60                                | 44                                | 32                                |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R290

# Back Bars



## CBC410-P

### Backbar Cooler

- Robust heavy duty equipment
- Ventilated cooling
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet

C



Drawers as option



Adjustable shelves





### CBC210-P

Backbar Cooler

- Robust heavy duty equipment
- Ventilated cooling
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet

C



### CBC310-P

Backbar Cooler

- Robust heavy duty equipment
- Ventilated cooling
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet

C

| MODEL                      |         | CBC210-P                    | CBC310-P                    | CBC410-P                    |
|----------------------------|---------|-----------------------------|-----------------------------|-----------------------------|
| Gross / Net Volume         | l       | 290 / 277                   | 460 / 442                   | 630 / 605                   |
| Gross / Net Weight         | kg      | 123 / 118                   | 143 / 138                   | 172 / 162                   |
| Net Volume Energy Rating   | l       | 250                         | 386                         | 518                         |
| Climate Class              |         | 4                           | 4                           | 4                           |
| Temperature Range          | °C      | 2 to 10                     | 2 to 10                     | 2 to 10                     |
| Door Number & Type         |         | 2 hinged self-closing doors | 3 hinged self-closing doors | 4 hinged self-closing doors |
| Shelves Number & Type      |         | 4 SS304 shelves             | 6 SS304 shelves             | 8 SS304 shelves             |
| Interior Light             |         | No                          | No                          | LED                         |
| Feet / Legs                |         | 6 adjustable feet           | 8 adjustable feet           | 10 adjustable feet          |
| Exterior Finish            |         | Black                       | Black                       | Black                       |
| Interior Finish            |         | SS430 mirror polished       | SS430 mirror polished       | SS430 mirror polished       |
| Lock                       |         | Yes                         | Yes                         | Yes                         |
| Thermometer                |         | Yes                         | Yes                         | Yes                         |
| Type of Controller         |         | Electronic                  | Electronic                  | Electronic                  |
| Noise Level                | db(A)   | 42                          | 42                          | 42                          |
| Type of Cooling            |         | Ventilated                  | Ventilated                  | Ventilated                  |
| Type of Defrost            |         | Automatic                   | Automatic                   | Automatic                   |
| Refrigerant                |         | R290                        | R290                        | R290                        |
| Refrigerant Charge         | g       | 95                          | 95                          | 95                          |
| Input Power                | W       | 250                         | 250                         | 350                         |
| Voltage / Frequency        | V/Hz    | 220-240/50                  | 220-240/50                  | 220-240/50                  |
| Energy Consumption         | kWh/24h | 2,35                        | 2,85                        | 4,22                        |
| Energy Classification      |         | C                           | C                           | C                           |
| Internal Dimension (WxDxH) | mm      | 1082 x 415 x 760            | 1622 x 415 x 760            | 2162 x 415 x 760            |
| External Dimension (WxDxH) | mm      | 1462 x 513 x 860            | 2002 x 513 x 860            | 2542 x 513 x 860            |
| Packed Dimension (WxDxH)   | mm      | 1540 x 580 x 1050           | 2060 x 580 x 1050           | 2650 x 580 x 1050           |
| 40ft Container Load        | pcs     | 60                          | 44                          | 32                          |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# KEG Coolers



## CKC8-I

### KEG Cooler

- Ventilated cooling
- Self-closing doors
- Stainless steel interior
- 8x20 l. KEG capacity
- Adjustable feet

B



Electronic thermostat



Easy access to clean condenser



### CKC2-I KEG Cooler

- Ventilated cooling
- Self-closing door
- Stainless steel interior
- 2x20 l. KEG capacity
- Adjustable feet

B




### CKC4-I KEG Cooler

- Ventilated cooling
- Self-closing door
- Stainless steel interior
- 4x20 l. KEG capacity
- Adjustable feet

B

| MODEL                      |         | CKC2-I                | CKC4-I                | CKC6-I                | CKC8-I                |
|----------------------------|---------|-----------------------|-----------------------|-----------------------|-----------------------|
| 20 l KEG                   | pcs     | 2                     | 4                     | 6                     | 8                     |
| 50 l KEG                   | pcs     | 0                     | 1                     | 1                     | 2                     |
| Gross / Net Volume         | l       | 99 / 98               | 190 / 189             | 268 / 267             | 362 / 359             |
| Gross / Net Weight         | kg      | 58 / 53               | 74 / 69               | 86 / 81               | 96 / 90               |
| Net Volume Energy Rating   | l       | 98                    | 189                   | 367                   | 359                   |
| Climate Class              |         | 4                     | 4                     | 4                     | 4                     |
| Temperature Range          | °C      | 2 to 10               | 2 to 10               | 2 to 10               | 2 to 10               |
| Door Number & Type         |         | 1 hinged solid door   | 1 hinged solid door   | 2 hinged solid doors  | 2 hinged solid doors  |
| Interior Light             |         | No                    | No                    | No                    | No                    |
| Feet / Legs                |         | 4 adjustable feet     | 4 adjustable feet     | 4 adjustable feet     | 4 adjustable feet     |
| Exterior Finish            |         | Black                 | Black                 | Black                 | Black                 |
| Interior Finish            |         | SS430 mirror polished | SS430 mirror polished | SS430 mirror polished | SS430 mirror polished |
| Lock                       |         | No                    | No                    | No                    | No                    |
| Thermometer                |         | Yes                   | Yes                   | Yes                   | Yes                   |
| Type of Controller         |         | Electronic            | Electronic            | Electronic            | Electronic            |
| Noise Level                | db(A)   | 45                    | 45                    | 45                    | 45                    |
| Type of Cooling            |         | Ventilated            | Ventilated            | Ventilated            | Ventilated            |
| Type of Defrost            |         | Automatic             | Automatic             | Automatic             | Automatic             |
| Refrigerant                |         | R600a                 | R600a                 | R600a                 | R600a                 |
| Refrigerant Charge         | g       | 60                    | 95                    | 95                    | 95                    |
| Input Power                | W       | 160                   | 240                   | 240                   | 250                   |
| Voltage / Frequency        | V/Hz    | 220-240/50            | 220-240/50            | 220-240/50            | 220-240/50            |
| Energy Consumption         | kWh/24h | 1,92                  | 2,12                  | 2,17                  | 2,52                  |
| Energy Classification      |         | B                     | B                     | B                     | B                     |
| Internal Dimension (WxDxH) | mm      | 270 x 500 x 730       | 520 x 500 x 730       | 735 x 500 x 730       | 990 x 500 x 730       |
| External Dimension (WxDxH) | mm      | 555 x 590 x 860       | 880 x 590 x 860       | 1110 x 590 x 860      | 1350 x 590 x 860      |
| Packed Dimension (WxDxH)   | mm      | 600 x 620 x 1050      | 925 x 620 x 1050      | 1200 x 620 x 1050     | 1400 x 620 x 1050     |
| 40ft Container Load        | pcs     | 114                   | 86                    | 74                    | 52                    |

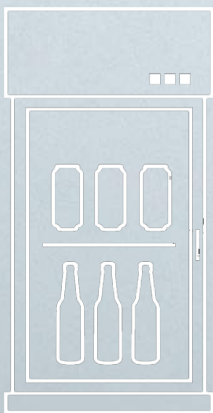

# STORAGE COOLERS

## Storage Coolers - Upright Coolers

The TEFCOLD upright storage cooler range goes from under-counter models to full-height refrigerators. They come in stainless steel or white-painted finishes, with solid or glass doors and with many other features.

We have storage coolers in a wide range of sizes and for any requirement.

The UR model is often used with its matching freezer (UF). The UR and UF models look great together, regardless of size or finish. UR models feature electronic thermostat.

The SD and SDU models are a little narrower, with a mechanical thermostat. They use a little more electricity than the UR models, but are a less-expensive alternative.



**TEFCOLD UR400S-I**

Storage cooler with reversible solid door and stainless steel cabinet.  
Solid and elegant backroom storage for any business.





COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Storage Coolers



## DID YOU KNOW?

Our focus has been on eco-friendly equipment for many years. We use eco-friendly refrigerants and have already designed our products according to the 2022 regulations.



Internal fan



Strong handle

## UR400-I

### Upright Cooler

- Reversible solid door
- Electronic thermostat
- Fan assisted cooling
- Lock
- Adjustable shelves
- Adjustable feet

C



## UR200-I

### Upright Cooler

- Reversible solid door
- Electronic thermostat
- Fan assisted cooling
- Lock
- Adjustable shelves
- Adjustable feet

A



## UR200S-I

### Upright Cooler

- Reversible solid door
- Electronic thermostat
- Fan assisted cooling
- Lock
- Stainless steel cabinet
- Adjustable shelves
- Adjustable feet

A

| MODEL                      |         | UR200-I              | UR200S-I             | UR400-I              | UR400S-I             |
|----------------------------|---------|----------------------|----------------------|----------------------|----------------------|
| Gross / Net Volume         | l       | 130 / 119            | 130 / 119            | 374 / 350            | 374 / 350            |
| Gross / Net Weight         | kg      | 52 / 44              | 52 / 44              | 85 / 80              | 85 / 80              |
| Net Volume Energy Rating   | l       | 78                   | 78                   | 265                  | 265                  |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                    |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 2 to 10              |
| Door Number & Type         |         | 1 hinged solid doors | 1 hinged solid doors | 1 hinged solid door  | 1 hinged solid door  |
| Reversible door            |         | Yes                  | Yes                  | Yes                  | Yes                  |
| Shelves Number & Type      |         | 3 wire shelves white | 3 wire shelves white | 4 wire shelves white | 4 wire shelves white |
| Shelf Dimensions           |         | 505 x 415 mm         | 505 x 415 mm         | 505 x 415 mm         | 505 x 415 mm         |
| Interior Light             |         | No                   | No                   | No                   | No                   |
| Feet / Legs                |         | 4 adjustable feet    | 4 adjustable feet    | 4 adjustable feet    | 4 adjustable feet    |
| Exterior Finish            |         | White                | SS430                | White                | SS430                |
| Interior Finish            |         | ABS                  | ABS                  | White ABS            | White ABS            |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                  |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | Yes                  |
| Type of Controller         |         | Electronic           | Electronic           | Electronic           | Electronic           |
| Noise Level                | db(A)   | 40                   | 40                   | 40                   | 40                   |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         | Fan assisted         |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Automatic            |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                |
| Refrigerant Charge         | g       | 35                   | 35                   | 75                   | 170                  |
| Input Power                | W       | 100                  | 100                  | 130                  | 130                  |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50           |
| Energy Consumption         | kWh/24h | 1,12                 | 1,12                 | 1,31                 | 1,31                 |
| Energy Classification      |         | A                    | A                    | C                    | C                    |
| Internal Dimension (WxDxH) | mm      | 510 x 485 x 620      | 510 x 485 x 620      | 510 x 485 x 1620     | 510 x 485 x 1620     |
| External Dimension (WxDxH) | mm      | 600 x 600 x 850      | 600 x 600 x 850      | 600 x 600 x 1850     | 600 x 600 x 1850     |
| Packed Dimension (WxDxH)   | mm      | 690 x 650 x 910      | 690 x 650 x 910      | 690 x 650 x 2050     | 690 x 560 x 2050     |
| 40ft Container Load        | pcs     | 108                  | 108                  | 54                   | 54                   |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Storage Coolers



Lock




Strong handle

## SD1380-I

### Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet

D






## SD1220-I

### Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet

E




## SD1280-I

### Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet

D



| MODEL                      |         | SD1220-I             | SD1280-I             | SD1380-I             |
|----------------------------|---------|----------------------|----------------------|----------------------|
| Cans 330 ml                | pcs     | 301                  | 392                  | 455                  |
| Cans 500 ml                | pcs     | 175                  | 259                  | 301                  |
| Bottles 330 ml             | pcs     | 133                  | 175                  | 217                  |
| Bottles 500 ml PET         | pcs     | 133                  | 175                  | 217                  |
| Gross / Net Volume         | l       | 215 / 190            | 290 / 260            | 372 / 345            |
| Gross / Net Weight         | kg      | 67 / 63              | 68 / 60              | 73 / 65              |
| Net Volume Energy Rating   | l       | 133                  | 186                  | 222                  |
| Climate Class              |         | 4                    | 4                    | 4                    |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              |
| Door Number & Type         |         | 1 hinged solid doors | 1 hinged solid doors | 1 hinged solid doors |
| Reversible door            |         | Yes                  | Yes                  | Yes                  |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 5 wire shelves white |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm         |
| Interior Light             |         | No                   | No                   | No                   |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            |
| Exterior Finish            |         | White                | White                | White                |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  |
| Lock                       |         | Yes                  | Yes                  | Yes                  |
| Thermometer                |         | Yes                  | Yes                  | Yes                  |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            |
| Refrigerant                |         | R600a                | R600a                | R600a                |
| Refrigerant Charge         | g       | 70                   | 70                   | 80                   |
| Input Power                | W       | 197                  | 197                  | 215                  |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           |
| Energy Consumption         | kWh/24h | 1,88                 | 1,5                  | 1,8                  |
| Energy Classification      |         | E                    | D                    | D                    |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1027     | 470 x 440 x 1347     | 470 x 440 x 1555     |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1315     | 595 x 640 x 1635     | 595 x 640 x 1840     |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 1410     | 680 x 710 x 1740     | 680 x 710 x 1940     |
| 40ft Container Load        | pcs     | 54                   | 54                   | 54                   |



COOLERS



ECO-FRIENDLY  
REFRIGERANT R600a

# Storage Coolers



Lock




Strong handle

## SDU1375-I

### Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet

D









### SDU1220-I Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet



### USS300SD-I Chest Bottle Cooler

- Flat sliding solid lids
- Powder coated white steel inner liner
- Castors with brake
- Available with copper tubing



E

| MODEL                      |         | SDU1220-I            | SDU1280-I            | SDU1375-I            | USS300SD-I             |
|----------------------------|---------|----------------------|----------------------|----------------------|------------------------|
| Cans 330 ml                | pcs     | 301                  | 392                  | 455                  | 400                    |
| Cans 500 ml                | pcs     | 175                  | 259                  | 301                  | 245                    |
| Bottles 330 ml             | pcs     | 133                  | 175                  | 217                  | 245                    |
| Bottles 500 ml PET         | pcs     | 133                  | 175                  | 217                  | 245                    |
| Gross / Net Volume         | l       | 215 / 190            | 290 / 260            | 372 / 345            | 296 / 261              |
| Gross / Net Weight         | kg      | 67 / 63              | 68 / 60              | 73 / 65              | 66 / 61                |
| Net Volume Energy Rating   | l       | 133                  | 186                  | 222                  |                        |
| Climate Class              |         | 4                    | 4                    | 4                    | 4                      |
| Temperature Range          | °C      | 2 to 10              | 2 to 10              | 2 to 10              | 1 to 10                |
| Door Number & Type         |         | 1 hinged solid doors | 1 hinged solid doors | 1 hinged solid door  |                        |
| Reversible door            |         | Yes                  | Yes                  | Yes                  | -                      |
| Lid Number & Type          |         |                      |                      |                      | 2 solid sliding lids   |
| Shelves Number & Type      |         | 3 wire shelves white | 4 wire shelves white | 5 wire shelves white |                        |
| Shelf Dimensions           |         | 490 x 360 mm         | 490 x 360 mm         | 490 x 360 mm         | -                      |
| Interior Light             |         | No                   | No                   | No                   | No                     |
| Feet / Legs                |         | 2 adjustable feet    | 2 adjustable feet    | 2 adjustable feet    | -                      |
| Castors                    |         | 2 rollers            | 2 rollers            | 2 rollers            | 4 wheels, 2 with brake |
| Exterior Finish            |         | White                | White                | White                | White                  |
| Interior Finish            |         | ABS                  | ABS                  | ABS                  | Coated steel           |
| Lock                       |         | Yes                  | Yes                  | Yes                  | Yes                    |
| Thermometer                |         | Yes                  | Yes                  | Yes                  | No                     |
| Type of Controller         |         | Mechanical           | Mechanical           | Mechanical           | Mechanical             |
| Noise Level                | db(A)   | 45                   | 45                   | 45                   | 44                     |
| Type of Cooling            |         | Fan assisted         | Fan assisted         | Fan assisted         | Static                 |
| Type of Defrost            |         | Automatic            | Automatic            | Automatic            | Manual                 |
| Refrigerant                |         | R600a                | R600a                | R600a                | R600a                  |
| Refrigerant Charge         | g       | 70                   | 70                   | 80                   | 60                     |
| Input Power                | W       | 197                  | 197                  | 215                  | 260                    |
| Voltage / Frequency        | V/Hz    | 220-240/50           | 220-240/50           | 220-240/50           | 220-240/50             |
| Energy Consumption         | kWh/24h | 1,68                 | 1,5                  | 1,8                  | 2                      |
| Energy Classification      |         | E                    | D                    | D                    | -                      |
| Internal Dimension (WxDxH) | mm      | 470 x 440 x 1027     | 470 x 440 x 1347     | 470 x 440 x 1555     | 890 x 510 x 663        |
| External Dimension (WxDxH) | mm      | 595 x 640 x 1315     | 595 x 640 x 1635     | 595 x 640 x 1840     | 1010 x 640 x 860       |
| Packed Dimension (WxDxH)   | mm      | 680 x 710 x 1410     | 680 x 710 x 1740     | 680 x 710 x 1940     | 1110 x 750 x 940       |
| 40ft Container Load        | pcs     | 54                   | 54                   | 54                   | 64                     |